

Decro 2000 COLOUR SELECTION

Decro 2000 Spray On Concrete Paving comes in 21 different colours for stencil lines and/or paving colour. This can be further expanded by the use of a fleck coating to give a mottle effect. Combining these colours gives you an extensive range for different effects.



Colours are a guide only and are as close as printing technology allows.


THE PROCESS WITH DECRO 2000 SPRAY ON CONCRETE PRODUCTS

1. Existing concrete pavement assessed.
2. Concrete is high pressure cleaned at 2500—3000 psi.
3. Grease, oil, algae, fungus and moss areas are treated.
4. Cracks prepared for Decro 2000 Grout.
5. Decro 2000 Grout applied to major level differences.
6. Decro 2000 Base applied.
7. Stencils, Rosettes and Headers laid.
8. Decro 2000 Spray On Concrete Paver applied.
9. Two coats of Ultra Violet (UV) and Light Stabilised Decro 2000 Paver Sealer applied.

Decro 2000 Spray On Concrete Paving is made to exacting standards to ensure the highest quality finish is obtained.

ENGINEERING SPECIFICATIONS

COMPRESSIVE STRENGTH	76 MPa
INDIRECT TENSILE STRENGTH	Over 20 MPa
SHEAR BOND STRENGTH	Over 7 MPa
DENSITY	23 kgs/m ³
ABRASION RESISTANCE	Over 5 times 40 MPa Normal Concrete

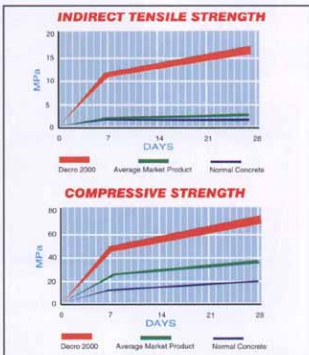

DECRO 2000 SPRAY ON CONCRETE PAVING

Manufactured by:



多沅(私人)有限公司

Multi-Stream (Pte) Limited

126, Joo Seng Road, #05-11, Gold Pine Industrial Bldg.,
Singapore 368355. Tel: 2883020, 2883040 Fax: 2883230