


# T.E.C. SafeFall By Delgrow

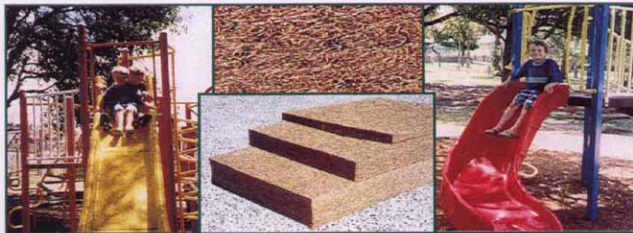

T.E.C. SafeFall by Delgrow is a soft fall underlay for use in playgrounds, pre-schools, etc. and has been certified as being able to absorb impact as defined by AS4422 when used in conjunction with artificial turf and a suitable drainage layer on a concrete base. T.E.C. SafeFall by Delgrow provides protection from serious head or other injury as the result of a fall from playground equipment or simply tripping over.

T.E.C. SafeFall by Delgrow is an alternative to messy bark chips and hard compressed rubber. Access by wheelchairs and prams is possible over the consolidated surface.

Tested to the requirements of AS/NZS 4422/Amdt 1/1999:

Test Conditions	Critical Fall Height
T.E.C. SafeFall-30 by Delgrow on Concrete	1.1m
T.E.C. SafeFall-60 by Delgrow on Concrete	2.3m
T.E.C. SafeFall-90 by Delgrow on Concrete	3.2m

Panel Size: 2m x 1m
Panel Thicknesses: 30mm; 60mm; 90mm

Sand Filled Artificial Turf  
 T.E.C. SafeFall by Delgrow  
 Drain-Cel  
 Concrete Base



**Composition:** 50% coir, 40% latex (natural rubber) and 10% compounded latex (mixture of chemicals and latex glue).

**Durability:** Used as directed T.E.C. SafeFall by Delgrow has an expected life span up to 15 years.

**Laying:** T.E.C. SafeFall by Delgrow sheets can be joined together using industrial grade latex glue.

**NOTE:** The information regarding AS4422 is intended as an information guide only. Under no circumstances should this information be used as a method for decision making regarding playground surfacing or any other application. The Application Standard AS4422:1996 should always be used as the specific reference and no liability howsoever is incurred through reliance upon this information.

AS4422:1996 is available through your local Standards Australia office for approximately \$30.00 per copy.

**TEPC**  
 TOTAL  
 EROSION  
 POLLUTION  
 CONTROL

HEAD OFFICE - SYDNEY  
 VICTORIA & TAS  
 QUEENSLAND  
 NTH QUEENSLAND  
 S.AUSTRALIA & N.T.  
 W. AUSTRALIA



多沅 (私人) 有限公司

**Multi-Stream (Pte) Limited**

126, Joo Seng Road, #05-11, Gold Pine Industrial Bldg.,  
 Singapore 368355, Tel: 2883020, 2883040 Fax: 2883230